

# Acoustical Underlay System for Carpet and Carpet Tiles

# superfloor®

## Superfloor® Benefits:

- Eliminates traditional carpet 'wear spots' and extends the life of the carpet
- Self-leveling qualities that correct as much as 1/8" over 3 ft. to 1/4" over 10 ft., saving money and time.
- Moisture and mold resistant
- Versatile installation options - accept glue-down or traditional installation with carpet tacks
- Re-useable with traditional installation method (not glue-down)
- Increased thermal insulation due to product design




## ACOUSTIC PERFORMANCE


Building Construction	IIC	Carpet Type
5.5" Concrete slab (no ceiling)	Δ34	5/16" carpet loose laid
5.5" Concrete slab (no ceiling)	Δ37	5/16" carpet glued down

Visit [www.soundseal.com](http://www.soundseal.com) for field and lab tests.

Note: Results may vary depending upon building and floor configurations. Test procedure methods per standards set forth by ASTM E492-90, ASTM E-989-89, ASTM E-1007-97, and ASTM E2179-03.

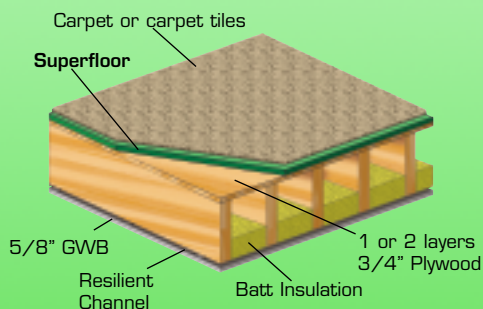

Typical Wood Construction

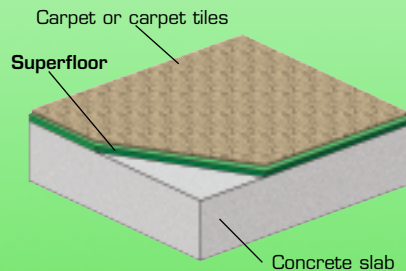

Typical Concrete Slab Construction

## Product Specifications

1/4" or 7mm thick  
 23 1/4" x 33 7/8" boards  
 20 boards per pack  
 109 sq. ft. per pack  
 43 lbs. per pack  
 3052 sq. ft. per skid  
 28 packs per skid  
 1,204 lbs. per skid  
 100% natural wood product  
 made from recycled material

## WARRANTY

Impacta™ Underlayments will remain responsible for the performance/consistent quality as long as they have installed according to the written instructions supplied by Sound Seal and in situations where the specific Impacta model is meant to be installed. Sound Seal warranties that spillage of casual water onto a finished floor with Superfloor installed will have no effect on the performance of the Superfloor. Any liability for sub-sequential damage is not accepted. The sound reducing capabilities of Impacta underlayments have been tested under laboratories conditions and therefore may differ in other situations.

## Accessories

None



50 H.P. Almgren Drive • Agawam, MA 01001

Tel. 800.569.1294 • Fax 413.789.4444

[www.impactaunderlayment.com](http://www.impactaunderlayment.com) • [impacta@soundseal.com](mailto:impacta@soundseal.com)

